



The ARIS is a stylish, contemporary air curtain designed to easily adapt to any interior. Its smooth front panel can be customised with logos, lighting, or safety information, blending aesthetics with functionality.

The self-supporting steel casing has rounded edges with plastic side covers, finished in white RAL9016 as standard, with other colours available upon request. A hidden top air entrance keeps the inlet grille out of sight, while anodized aluminum airfoil-shaped outlet vanes ensure optimal airflow.

An Advanced Pro controller, with built in sensors that intelligently monitor and control temperatures, is included. The wall mounted LCD display offers 2 fan speed selections and 3 heater stages for electrically heated units, or 2 speed fan selection for LPHW and air only units. 7 metres of control cable and an IR hand-held remote are supplied, as standard.

<b>COLOURS AVAILABLE</b> White RAL9016 (standard) Any RAL colour	<b>MOUNTING OPTIONS</b> Horizontal	<b>MAX DOOR HEIGHT</b> 3.5m	<b>FAN OPTIONS</b> AC fan	<b>HEATING OPTIONS</b> Electric LPHW Air only	<b>LENGTHS AVAILABLE</b> 1.0m 1.5m 2.0m
--	---------------------------------------	--------------------------------	------------------------------	--	--



## Air only

Model	Max Mounting Height m	Airflow* m³/h	Power/current fans 230V-50Hz kW/A	Noise Level (@3m) dB(A)	Weight kg
ARIS 1000 A	3.5	1900	0.123/0.59	37/52	20.5
ARIS 1500 A	3.5	2800	0.207/0.96	38/53	32
ARIS 2000 A	3.5	3800	0.253/1.18	39/54	39

## Electrically heated

Model	Max Mounting Height m	Airflow* m³/h	Electrical Heating 400Vx3-50Hz kW	Power/current fans kW/A	Noise Level (@3m) dB(A)	Weight kg
ARIS 1000 E	3.5	1800	3/6/9	0.123/0.59	37/52	24.5
ARIS 1500 E	3.5	2800	4/8/12	0.207/0.96	38/53	35
ARIS 2000 E	3.5	3600	6/12/18	0.253/1.18	39/54	50


## Water heated

Model	Max Mounting Height m	Airflow* m <sup>3</sup> /h	Water Heating Capacity 80/60°C kW	Water Drop Pressure 80/60°C Pa	Water Heating Capacity 60/40°C kW	Water Drop Pressure 60/40°C Pa	Power/ current fans 230V-50Hz kW/A	Noise Level (@3m) dB(A)	Weight kg
ARIS 1000 P86	3.5	1750	9.3	8980			0.116/0.53	39/53	23.5
ARIS 1000 P64	3.5	1600			7.2	8520	0.107/0.48	39/53	23.5
ARIS 1500 P86	3.5	2625	14.5	9150			0.187/0.86	40/54	34
ARIS 1500 P64	3.5	2350			11.1	8490	0.172/0.83	40/54	35
ARIS 2000 P86	3.5	3500	19.3	8490			0.222/1.03	41/55	43.5
ARIS 2000 P64	3.5	3200			15.0	8140	0.206/0.98	41/55	43.5

Water heated: connection pipes 1/2" female. P86 of 2 rows coil. P64 of 3 rows coil.

(\*) Airflow tested to Amca 220-05

## Layouts and dimensions

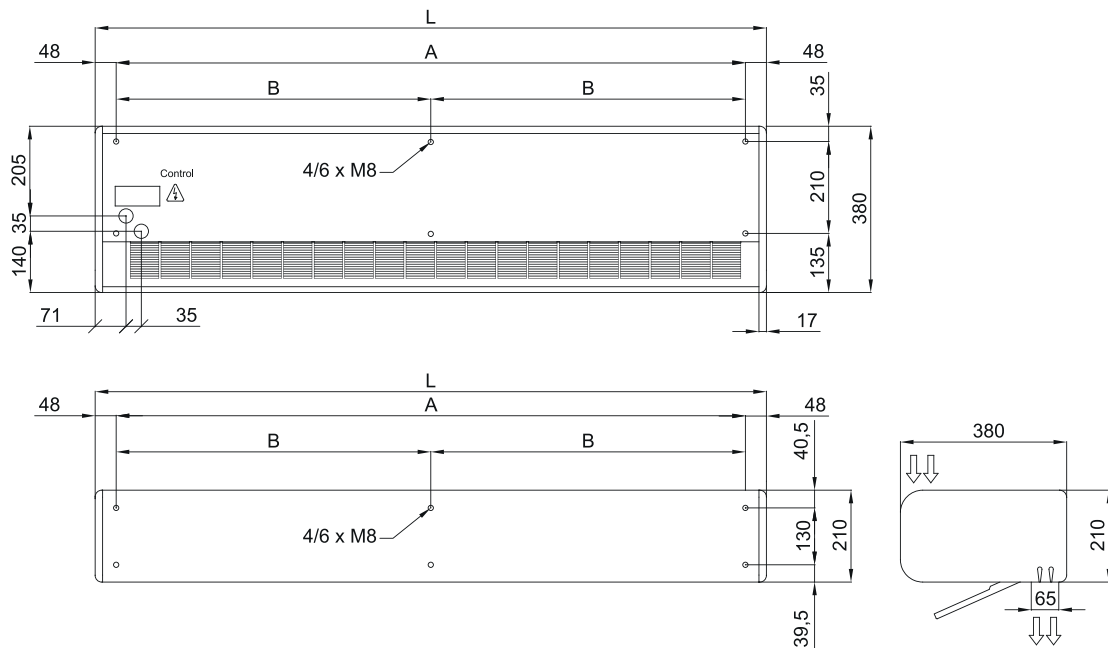

	L	A	B
ARIS 1000	1034	940	-
ARIS 1500	1534	1440	-
ARIS 2000	2034	1940	970