

Aris

The Aris is a stylish, contemporary air curtain designed to easily adapt to any interior. Its smooth front panel can be customised with logos, lighting, or safety information, blending aesthetics with functionality. The inlet grille is hidden in the upper part, thus avoiding the internal vision of the air curtain and the filter, making it a top air curtain for commercial entrances up to 3.5 meters high, without clashing with the interior architecture and design of the premises.

The self-supporting steel casing has rounded edges with plastic side covers, finished in white RAL9016 as standard, with other colours available upon request. A hidden top air entrance keeps the inlet grille out of sight, while anodized aluminum airfoil-shaped outlet vanes ensure optimal airflow.

An Advanced Pro controller, with built in sensors that intelligently monitor and control temperatures, is included. The wall mounted LCD display offers 2 fan speed selections and 3 heater stages for electrically heated units, or 2 speed fan selection for LPHW and air only units. 7 metres of control cable and an IR hand-held remote are supplied, as standard. An optional Clever PRO intelligent programmable control compatible with Modbus RTU for BMS is also available.



Colours Available

White RAL9016 (standard)
Any classic RAL colour



Fan Options

AC fan



Mounting Options

Horizontal



Heating Options

Electric, LPHW
Air Only



Max Door Height

3.5 m



Lengths Available

1.0m 1.5m
2.0m



Air Only

Model	Max mounting height m	Airflow m ³ /h*	Power/current fans kW/A	Noise level (@3m) dB(A)	Weight kg
ARIS 1000 A	3.5	1900	0.123/0.59	37/52	20.5
ARIS 1500 A	3.5	2800	0.207/0.96	38/53	32
ARIS 2000 A	3.5	3800	0.253/1.18	39/54	39

Electrically Heated


Model	Max mounting height m	Airflow m ³ /h*	Electrical heating 400Vx3-50Hz kW	Power/current fans kW/A	Noise level (@3m) dB(A)	Weight kg
ARIS 1000 E	3.5	1800	9	0.131/0.59	37/52	24.5
ARIS 1500 E	3.5	2800	12	0.207/0.96	38/53	35
ARIS 2000 E	3.5	3600	18	0.253/1.18	39/54	50

Water Heated

Model	Max mounting height m	Airflow m ³ /h*	Water heating capacity 80/60°C kW	Water drop pressure 80/60°C Pa	Water heating capacity 60/40°C kW	Water drop pressure 60/40°C Pa	Power/current fans 230V-50Hz kW/A	Noise level (@3m)dB(A)	Weight kg
ARIS 1000 P86	3.5	1750	9.3	7630			0.116/0.53	39/53	23.5
ARIS 1000 P64	3.5	1600			7.0	7630	0.107/0.48	39/53	23.5
ARIS 1500 P86	3.5	2625	14.5	7750			0.187/0.86	40/54	34
ARIS 1500 P64	3.5	2350			10.6	7050	0.172/0.83	40/54	35
ARIS 2000 P86	3.5	3500	19.3	7140			0.222/1.03	41/55	43.5
ARIS 2000 P64	3.5	3200			14.3	6740	0.206/0.98	41/55	43.5

Water heated: connection pipes 1/2" female. P86 of 2 rows coil. P64 of 3 rows coil. *Tested to Amca 220-05

Layouts and Dimensions

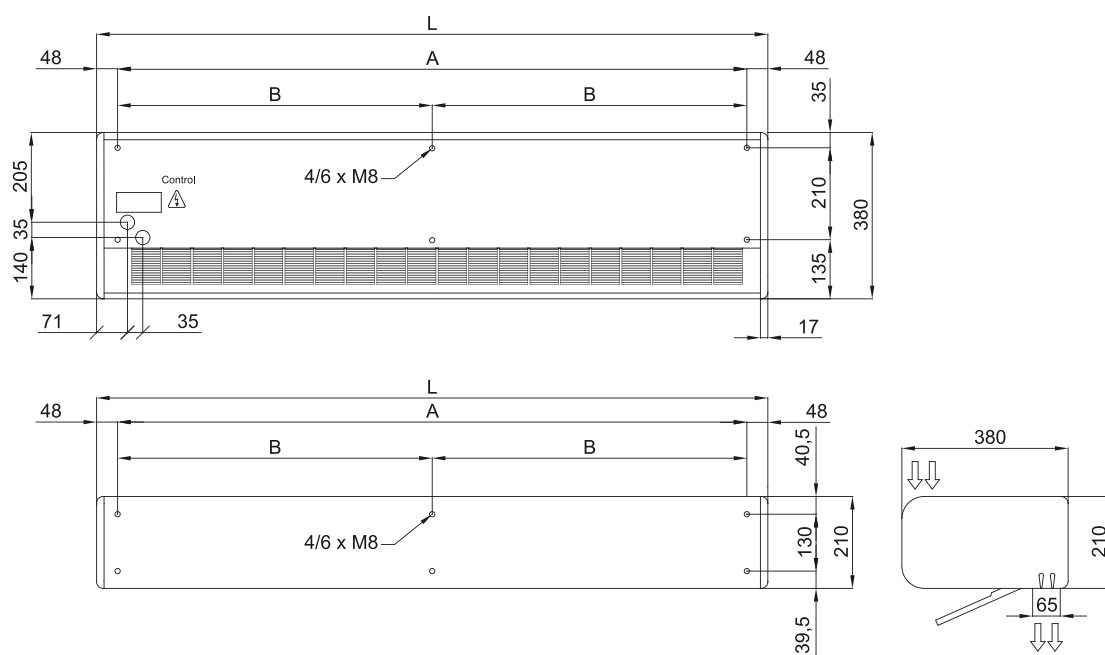

	L	A	B
ARIS 1000	1034	940	-
ARIS 1500	1534	1440	-
ARIS 2000	2034	1940	970