



Option available

The Invisair air curtain has been designed for applications where the body of the unit is to be concealed inside a column or bulkhead for architectural reasons.

Unlike the conventional air curtain arrangement where the air is discharged at right angles to the air inlet assembly, the Invisair air intake and discharge grille are in the same plane so that the air flows through the unit in a straight line.

This air curtain is suitable for commercial and industrial premises. Using air curtains in these types of situations makes internal temperature control more practical, as heat loss through these often open doors is significantly reduced.

A standard manual controller and 7 metres of control cable are included. Other control options available include the Clever controller or the BMS interface.

COLOURS AVAILABLE
White RAL9016 (standard)
Any RAL colour

MOUNTING OPTIONS
Horizontal
Vertical

CEILING MAX HEIGHT
4.2m

FAN OPTIONS
AC fan (standard)
EC fan (option)

HEATING OPTIONS
Electric
LPHW
Air only

LENGTHS AVAILABLE
1.5m
2.0m
2.5m



Air only

Model	Max mounting height m	*Airflow m³/h	Power/current fans 230V-50Hz kW/A	Noise level (@5m) dB(A)	Weight kg
IM 1500 A	3.5	2640	0.424 / 1.88	56	55
IM 2000 A	3.5	3960	0.636 / 2.82	57	68
IM 2500 A	3.5	4620	0.742 / 3.29	58	73
IG 1500 A	3.8	3200	0.856 / 3.80	58	60
IG 2000 A	3.8	4800	1.284 / 5.70	59	78
IG 2500 A	3.8	5600	1.498 / 6.65	60	83
IECG 1500 A	4.2	3600	0.300 / 2.60	62	60
IECG 2000 A	4.2	5400	0.450 / 3.90	63	78
IECG 2500 A	4.2	6300	0.525 / 4.55	64	83

Electrically heated

Model	Max mounting height m	*Airflow m³/h	Electrical heating capacity 400Vx3-50Hz kW	Power/current fans 230V-50Hz kW/A	Noise level (@5m) dB(A)	Weight kg
IM 1500 E	3.5	2640	4/8/12	0.424 / 1.88	56	67
IM 2000 E	3.5	3960	6/12/18	0.636 / 2.82	57	86
IM 2500 E	3.5	4620	6/12/18	0.742 / 3.29	58	93
IG 1500 E	3.8	3200	7.5/15/22.5	0.856 / 3.80	58	73
IG 2000 E	3.8	4800	10/20/30	1.284 / 5.70	59	96
IG 2500 E	3.8	5600	10/20/30	1.498 / 6.65	60	103
IECG 1500 E	4.2	3600	7.5/15/22.5	0.300 / 2.60	62	73
IECG 2000 E	4.2	5400	10/20/30	0.450 / 3.90	63	96
IECG 2500 E	4.2	6300	10/20/30	0.525 / 4.55	64	103


*tested to AMCA 220-05

Water heated

Model	Max mounting height m	*Airflow m ³ /h	P86		P64		P54		Power/current fans 230V-50Hz kW/A	Noise level (@5m) dB(A)	Weight kg
			Water heating capacity 80/60°C kW	Water drop pressure 80/60°C Pa	Water heating capacity 60/40°C kW	Water drop pressure 60/40°C Pa	Water heating capacity 50/40°C kW	Water drop pressure 50/40°C Pa			
IM 1500 P	3.5	2480	14.23	760	13.65	6430	-	-	0.424 / 1.88	56	63
IM 2000 P	3.5	3720	22.17	2190	19.70	5470	-	-	0.636 / 2.82	57	78
IM 2500 P	3.5	4340	27.69	4000	23.48	4060	-	-	0.742 / 3.29	58	86
IG 1500 P	3.8	3000	16.02	940	15.47	8020	16.37	5670	0.856 / 3.80	58	69
IG 2000 P	3.8	4500	24.92	2700	22.29	6810	23.15	3030	1.284 / 5.70	59	89
IG 2500 P	3.8	5250	31.16	4930	26.61	5060	28.76	5450	1.498 / 6.65	60	94
IECG 1500 P	4.2	3400	17.29	1070	16.77	9240	17.86	6620	0.300 / 2.60	62	69
IECG 2000 P	4.2	5100	26.86	3080	24.14	7850	25.24	3530	0.450 / 3.90	63	89
IECG 2500 P	4.2	5950	33.63	5650	28.84	5840	31.38	6360	0.525 / 4.55	64	94

P86 - 2 rows coil, 2 x ¼" female connector. P64 - 3 rows coil, 2 x ¼" female connector. P54 - 4 rows coil, 2 x 1" male connector. *tested to AMCA 220-05

Layout and dimensions

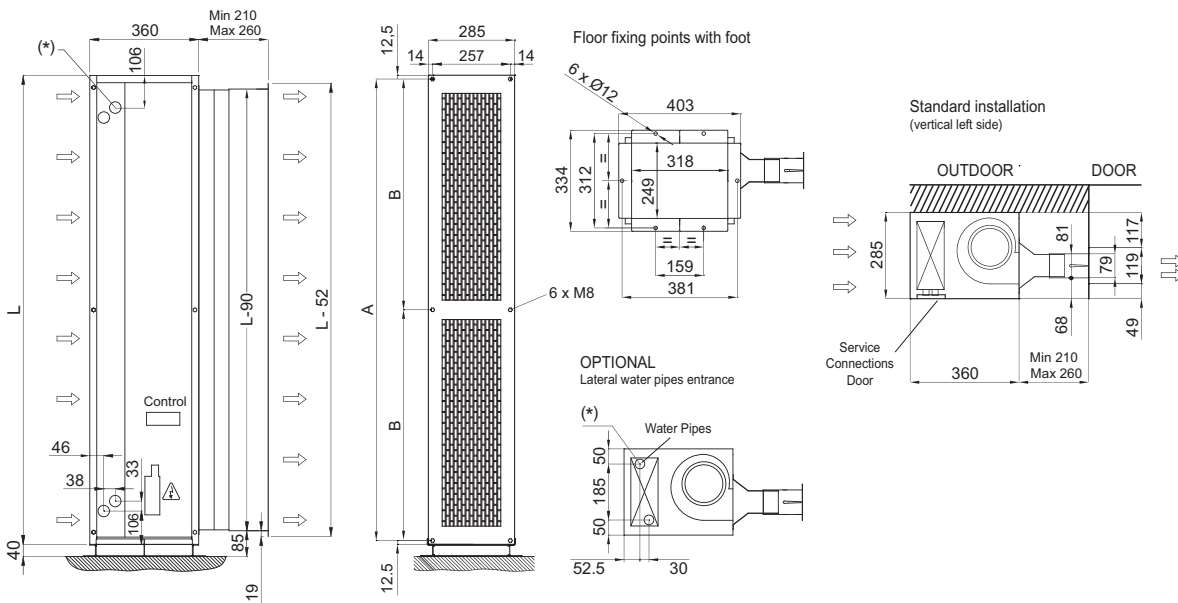

(*) IN/OUT Water pipes connection (in water heated units)

Installation examples



	L	I	A
1500	1550	1525	726.5
2000	2055	2030	1015
2500	2555	2530	1265